






C


2.3.3 Coulisseaux et chariots pour mâts C

Sur les mâts Seldén il est impératif d'employer les coulisseaux ou les chariots conformes aux dimensions des fenêtres d'engoujure Seldén.

Réf.	Coulisseau (mm)	Pour gorge de mât (mm)	Charge de rupture (N)	Réf. Bainbridge :
511-606 511-605	 <p>Fig. 2.3.3.a</p>	10	2250 N (225 kgf)	A011
511-607	 <p>Fig. 2.3.3.b</p>	10	4000 N (400 kgf)	A012
511-702-02	 <p>Fig. 2.3.3.c</p>	10 ¹⁾	2000N (200 kgf)	-
511-701-02	 <p>Fig. 2.3.3.d</p>	10 ¹⁾	3000N (300 kgf)	-
511-730-02	 <p>Fig. 2.3.3.e</p>	16 ¹⁾	4500N (450 kgf)	-

1) Voir Profilés de mât en pages 11 et 13.

2.3.4 Manilles pour coulisseaux

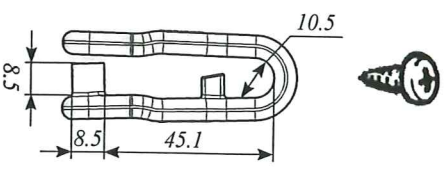Réf.	Manille (mm)	Pour coulisseau (mm)	Charge de rupture (N)	Réf. Bainbridge :
307-094-01		511-606 511-607 511-701-01 511-702-01	2000N (200 kgf)	-