


**Mast Sections**

Section	Length mm	Width mm	$I_y$ $cm^4$	$I_x$ $cm^4$	Wall thickness mm	Weight kg/m	$W_y$ $cm^3$	$W_x$ $cm^3$	Sail Groove
	± 1%	± 1%	± 5%	± 5%	± 5%	± 5%	± 5%	± 5%	
<b>C080</b>	79	60	37.0	22.0	2.0	1.49	8.6	7.4	4.5
<b>C087</b>	87	64	49.8	27.5	2.0	1.67	10.6	8.74	4.5
<b>C096</b>	96	69	65.7	34.6	2.0	1.79	12.67	10.15	4.5
<b>C106</b>	106	71	92.6	44.1	2.0	1.97	15.95	12.63	5.0
<b>C116</b>	116	75	126.4	57.2	2.3	2.26	19.88	15.41	5.0
<b>C126</b>	126	79	172.2	74.6	2.4	2.54	25.37	18.99	5.0
<b>C139</b>	139	85	237.4	99.0	2.5	2.94	31.33	23.33	5.0

**Spreader Sections**

Type	Length mm	Width mm	$I_y$ $cm^4$	$I_x$ $cm^4$	Weight kg/m	$W_y$ $cm^3$	$W_x$ $cm^3$
	± 1%	± 1%	± 5%	± 5%	± 5%	± 5%	± 5%
<b>P35</b>	35	10					
<b>P50</b>	50	19	3.82	0.75	0.47	1.4	0.8
<b>T60</b>	60	20	10.2	1.64	0.72	3.21	1.64

Sections C080, C087, C096

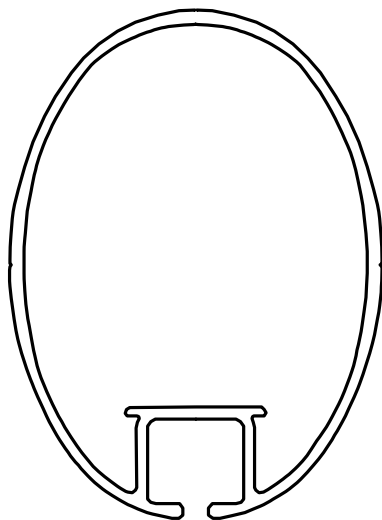

Sections C106, C116, C126, C139

